



Direct manufacturing of m structured surfaces by vat potopolymerization method

Davoudinejad, A.; Pedersen, D. B.; Tosello, G.

Publication date:
2018

Document Version
Publisher's PDF, also known as Version of record

[Link back to DTU Orbit](#)

Citation (APA):
Davoudinejad, A., Pedersen, D. B., & Tosello, G. (2018). *Direct manufacturing of m structured surfaces by vat potopolymerization method*. Abstract from Euspen Special Interest Group Meeting 2018: Structured & Freeform Surfaces, Cachan, France.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Direct manufacturing of μm structured surfaces by vat photopolymerization method


A. Davoudinejad, D. B. Pedersen, G. Tosello

Department of Mechanical Engineering, Technical Univ. of Denmark, Building 427A, Produktionstorvet, 2800 Kgs. Lyngby, Denmark

alidav@mek.dtu.dk

Abstract

Nature has developed desired functional surfaces on a different scale from macro to molecular scale. For instance, micro-fluidics, a lotus-like characteristic and water repellence surfaces with self-cleaning properties structures are requested for different applications. Various manufacturing methods were applied for fabrication of micro surfaces such as Lithographie, Galvanoformung, Abformung (LIGA), Photolithography and soft lithography and dip-transfer method that consists of several process steps for final part production. Additive manufacturing (AM), unlike previous methods is possible for direct fabrication of complex microscale features by decreasing the manufacturing time and reducing production cost. This study evaluates the direct fabrication of micro features by AM process. The part was designed in a hierarchical structure with the neck diameter of $400\ \mu\text{m}$ and a 20° draft angle surface, on the top the array of pillars were placed with the diameter from $90\ \mu\text{m}$ down to $60\ \mu\text{m}$. Vat photopolymerization method was used with a specifically designed AM machine tool proper for precision micro dimensional scale manufacturing. In this method, the printing parameters were tuned based on the previous studies in order to improve the fabrication quality of the process.

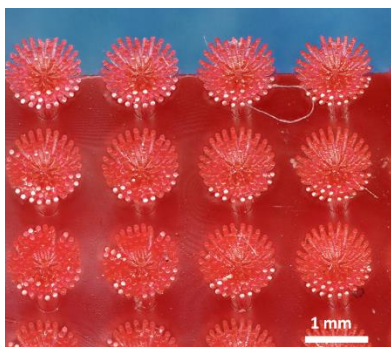

(a)



(b)

Figure 1: the printed features inspired from nature.